


> MICRODRYWALL FLUE IP65



SPECIFICA TECNICA TECHNICAL SPECIFICATION

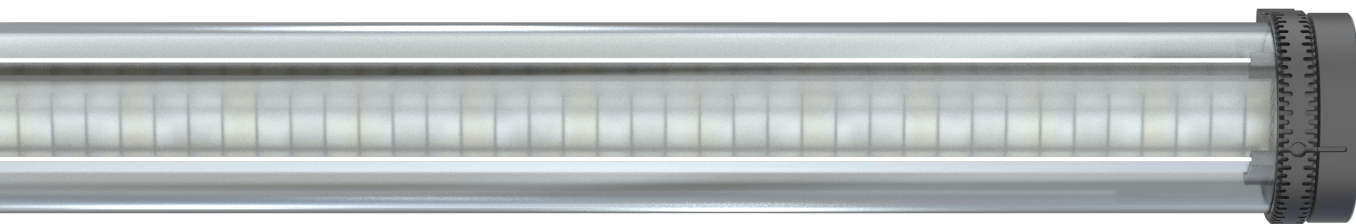

Apparecchio con ottiche lineari a plafone e/o in appoggio per illuminazione a LED per ambienti esterni. Utilizza le nostre ottiche simmetriche Low Contrast, asimmetriche Wall Washer e Ceiling Washer. Le ottiche sono in alluminio Miro Silver con altissimo rendimento >98%. Sono previste micro alette all'interno delle ottiche al di sotto del diffusore.

Un diffusore in policarbonato frost posizionato all'interno dell'ottica e davanti alla scheda led permette un'emissione luminosa omogenea e confortevole con assenza di fenomeni di abbagliamento e attenuazione delle ombre con effetto di luce "avvolgente".

Due finali in poliammide permettono la rotazione ed il fissaggio dell'apparecchio con viti.

Ceiling mounted system for linear LED lighting for outdoor environments using our symmetrical Low Contrast optics and asymmetrical Wall Washer optics. The optics are in Miro Silver aluminum with very high efficiency >98%. There are micro louvers inside the optics below the diffuser.

A frost polycarbonate diffuser positioned inside of the optics and in front of the led board allows an emission homogeneous and comfortable light with absence of phenomena of glare and attenuation of shadows with "enveloping" light effect.

Two polyamide ends allow the fixture to be fixed with screws.

